



MANUAL PULL STATION EXPLOSION PROOF 05 PX-32TKS


FEATURES

- Single Action Station that is Operated by Pulling the Pull Handle
- Ease of Visibility from up to 50 feet (15 metres)
- Key Lock Prohibits Unauthorised Reset
- Die-Cast Metal Construction
- Single or Dual Action Configurations
- Double Pole Double Throw Switch
- Screw Terminal Connections (up to 14 AWG). Suits Conduit Fitting Size $\frac{3}{4}$ " - 14 NPT
- Two sets of Form C Contact. Rated at 1.0 amps at 30 VDC and 1 amp at 125 VAC
- NEMA Type 4 Weatherproof Enclosure
- High Glass Red Enamel Finish
- UL listed, FM and MEA Approved, NEMA 4X Rated



Wiring Diagrams

To Fire Alarm Control Panel

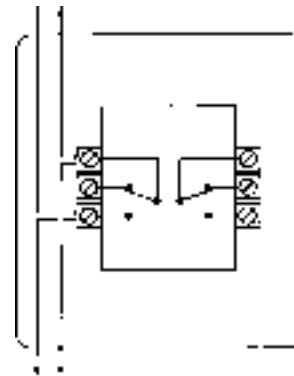

To Next Device Or EOLR

Approved for use in Class 1, Groups B, C and D; Class II, Groups E, F and G; and Class III hazardous environments. The manual pull station also has a marine rating and is operated simply by pulling the pull handle on the front of the station as far down as it will go, at which point the handle locks into place. The activated station is reset by opening the station with a key, placing the handle in the normal, upright position, and re-locking the station.

Dimensions: 6-5/16"L x 3-1/4"W and 3-7/8"H (16.0cmL x 8.25cmW x 9.84cmH). Weight: 2 lbs. (0.9kg).