



COMBINATION SHOWER & EYEWASH STATION

PGS-8300

Model 8300 combination shower and eyewash features a 10" ABS plastic showerhead and a stainless steel eyewash receptor with twin Soft-Flo ABS plastic anti-surge eyewash heads. A pull rod activates shower. Push flag or foot treadle activates eyewash. Pipe and fittings: 1 1/4" Schedule 40 hot-dipped galvanized steel. Supply and waste: 1-1/4" IPS.

Model 8300 is certified by CSA to meet the ANSI Z358.1 Standard for Emergency Eyewash and Shower Equipment.

Components:

Shower Head: Model 8129FC green ABS plastic 10" showerhead with integral 20-gpm flow control.

Shower Valve: Model SP260 chrome-plated brass stay-open ball valve, equipped with a stainless steel stem. Full flow occurs with pull on lever. 1" IPS.

Pull Rod: Model SP200, 28" long stainless steel pull rod with triangular handle.

Eyewash Head Assembly: Model SP62FC with Soft-Flo SP11FC ABS plastic eyewash anti-surge heads, one-piece electropolished Type 304 stainless steel eyewash yoke, and 9095 dust covers. 1/4" IPS.

Eyewash Head: Model SP11FC green ABS plastic anti-surge Soft-Flo eyewash head with built-in 1.2 gpm flow control. 1/4" IPS.

Dust Cover: Model 9095 green polyethylene plastic dust cover. Dust covers protect heads and automatically releases with water pressure.

Receptor: Model SP90 11" round stainless steel with No. 2L bright finish on exterior.

Eyewash Valve: Model SP225 chrome-plated brass stay-open ball valve, equipped with a stainless steel ball and stem. Full flow occurs with push on stainless steel flag. 1/2" IPS inlet x 1/4" IPS outlet.

In-Line Strainer: Model SP509 chrome-plated brass in-line 50 x 50 mesh water strainer that prevents debris from reaching the eye/face wash. Easily serviceable. 1/2" IPS inlet x 1/4" IPS outlet.

Foot Treadle: Model SP220 foot control assembly, including chain, clamp, nut, ring, screw, spring and powder-coated aluminum treadle.

Mounting: Model SP75 gray powder-coated cast-iron 9" diameter floor flange with 1-1/4" IPS hot-dip galvanized tee.

Universal Sign: Model SP178 vertical universal combination emergency shower and eyewash sign. Size: 8" x 11".

High-Visibility Stripe: Model SP185 self-adhesive high visibility 21" long stripe in Safety Green and bright yellow.

Test This Week Tag: SP170 is a Green waterproof test card with space for date and initials of inspector. Used to record weekly testing of emergency equipment.



Options: (Additional costs may apply)

Tempered Water Blending Systems: Model TWBS.SH tempered water blending system with redundant fail-safe features, prepackaged, fully engineered and tested system for mixing large volumes of hot and cold water to provide tempered water for showers and eyewashes.

Tempered Water Blending Valves: Model 9202 thermostatic mixing valve that mixes hot and cold water for the tempering of water for eyewash and showers. Maximum flow rate is 40 gpm.

Shower Head: Model 8127FC corrosion-resistant 10" stainless steel showerhead with integral 20-gpm flow control.


Dust Cover: Model 9102 stainless steel dust cover assembly. Cover protects eye, eye/face wash and spray ring as well as bowl. Pushing the flag valve raises the dust cover and activates unit.

Alarm: Model 9001 120 VAC emergency alarm and light system. Buzzer and flashing light are activated by flow switch when emergency shower or eyewash is in use.

Privacy Curtain: Model 9037 privacy curtain designed to be used on horizontal emergency drench shower or combination emergency drench shower and eyewash units.

COMBINATION SHOWER & EYEWASH STATION

09 8300

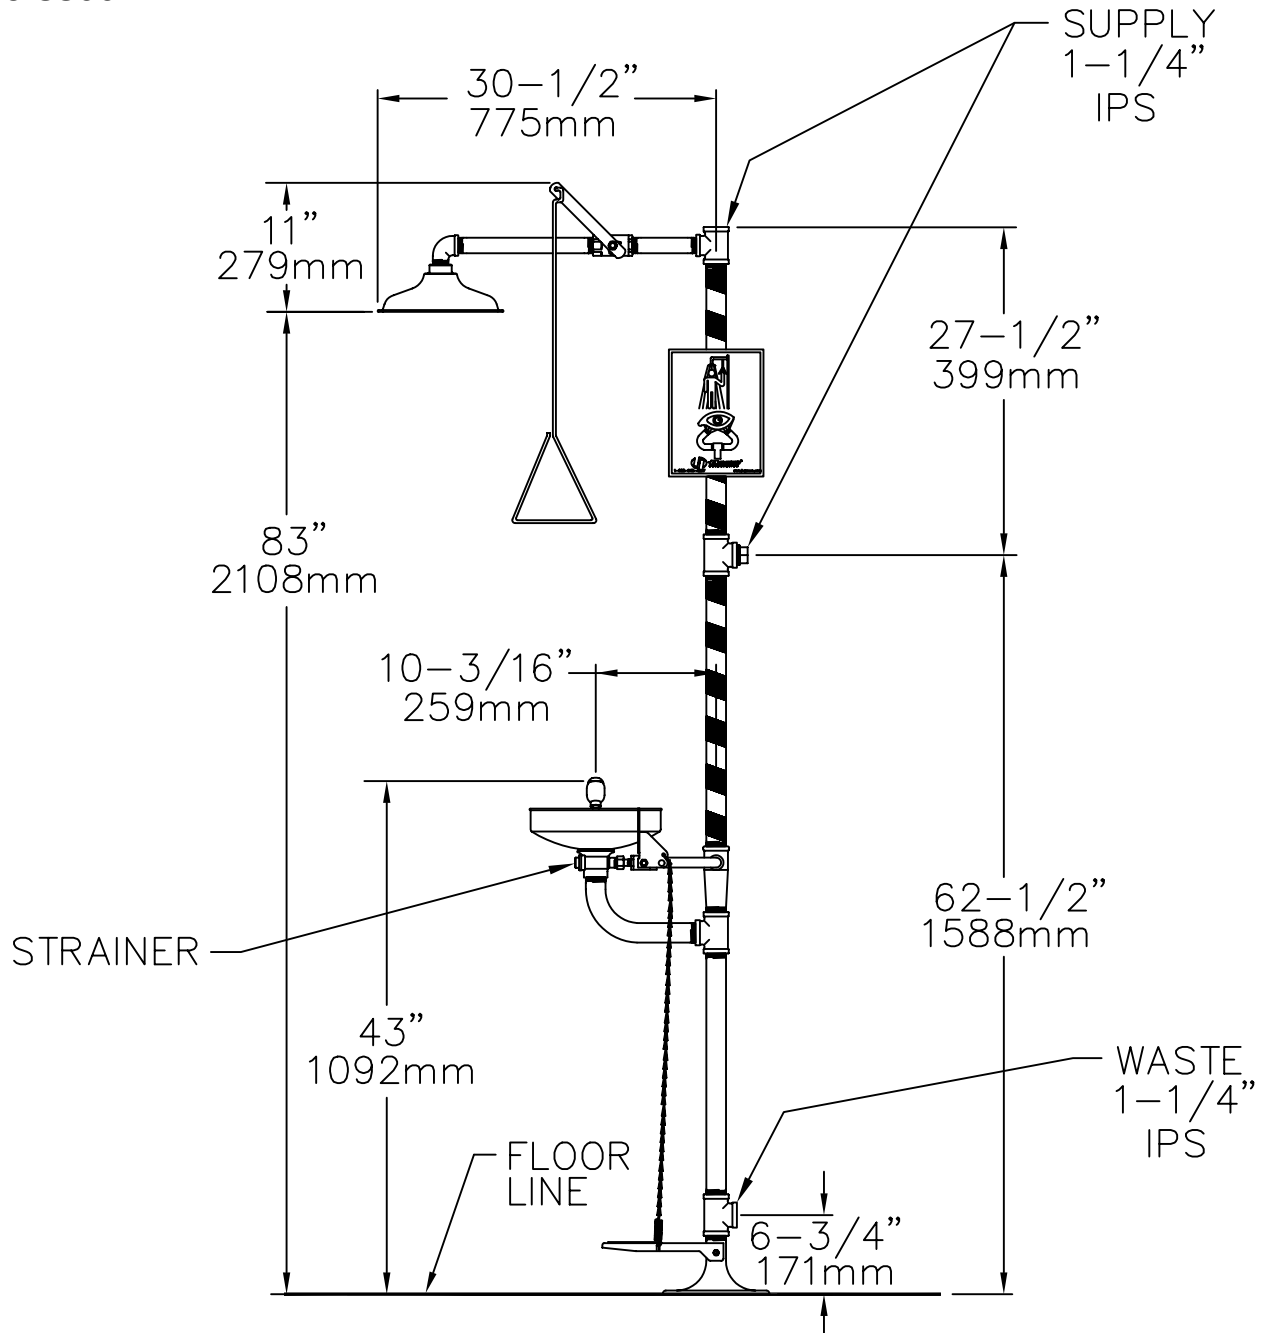

DIMENSIONS MAY VARY $\pm 1/2"$ [12.7mm]

MOUNTING DETAIL

